



ThermalSpection™ CVM


Real-Time Fault Detection and Monitoring for Critical Vessels

- Early fault detection reduces risk, emergencies, and unplanned outages
- Continuous, automated monitoring
- Integrates into existing plant control system and data historian archive
- Designed for hazardous area installations (ATEX and Class I, Div 2)
- Proven technology from the world leader, with installations in the US, Europe, and Asia


Real-Time, Non-Contact Fault Detection

Critical vessels in the chemicals, refining, and power industries operate at high temperature and pressure and are at risk of failure as joints and refractory degrade. The consequences of undetected failures can be very serious.

Conventional methods of real-time monitoring are unreliable and expensive to install and operate. LumaSense's ThermalSpection™ CVM infrared imaging system offers real-time, continuous fault and hot-spot monitoring, allowing plant operators to identify problems before they become emergencies. The system offers a turnkey solution for monitoring critical vessels, such as gasifier skin temperature.

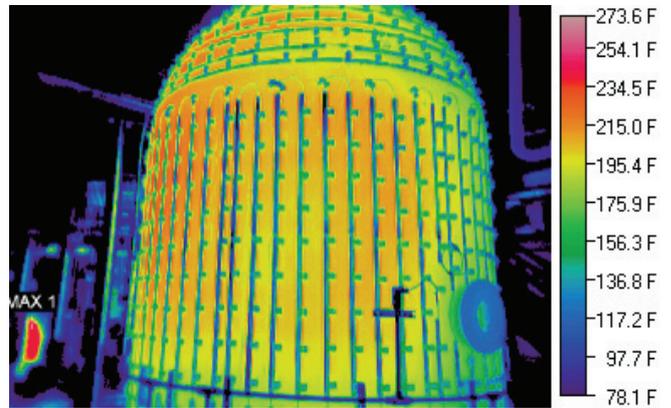


ThermalSpection System Monitoring a Gasifier

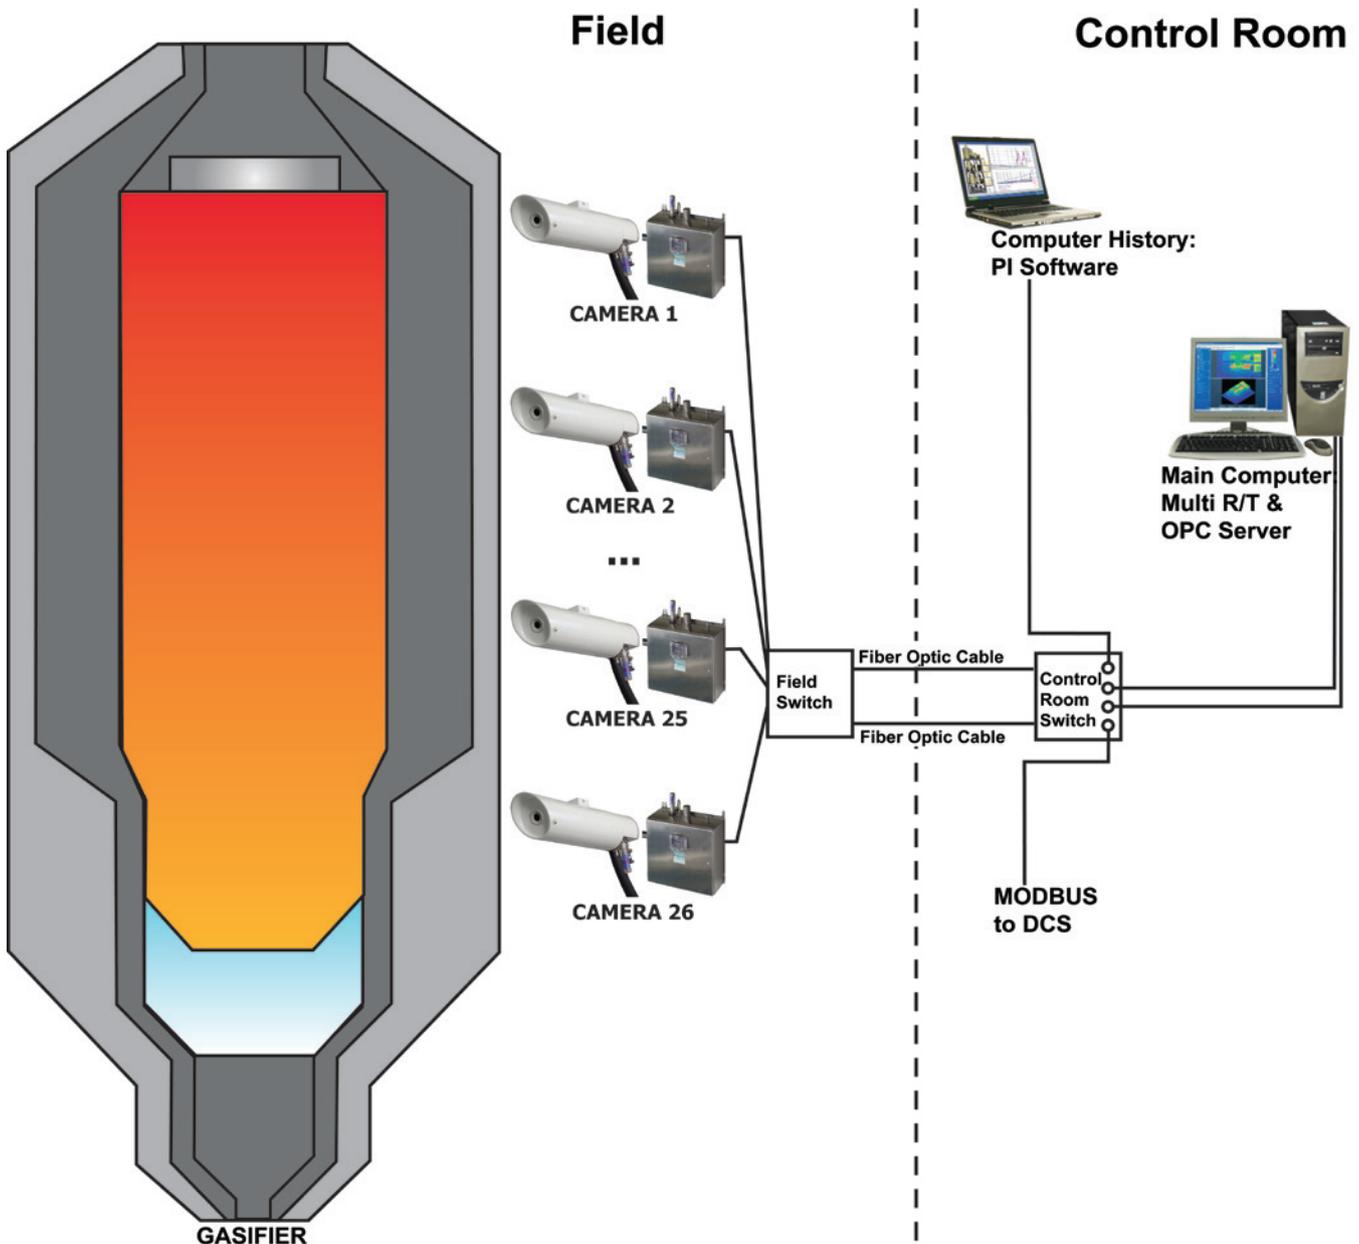

Easy to Use Software with Automated Analysis

LumaSense's LumaSpec™ software provides advanced features in a user-friendly interface. From a single computer, the software can send commands to and gather data from up to 24 cameras mounted in the field. Thermal data can be captured in snapshot frames at set intervals, or capture can be triggered by temperature alarms connected to user-defined Regions of Interest.

- Auto "Hot Spot" Tracking Feature
- HTML displays for broadcast on plant intranet
- Rate of change temperature charts
- Data Historian Archive
- Integrates with Plant's DCS
- OPC/Modbus interface supported
- Optional integration with third party PI database systems

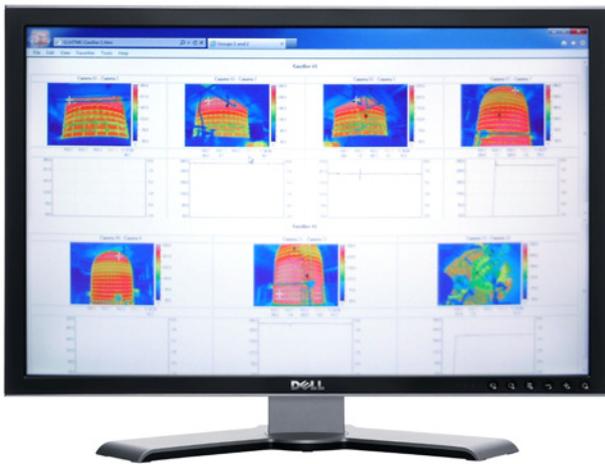

Easy Integration into the Plant's DCS

The ThermalSpec system is fully digital and uses standard Ethernet LAN. This allows easy and cost-effective transfer of digital image data to control rooms. Additionally, our software has modules that support output via Modbus or OPC to the plant's DCS.

System Options

The ThermalSpec system has several optional components, allowing you to customize a solution for your specific needs:

- Analog outputs
- Auxiliary pyrometer sensors integrated into the system to measure critical areas or tight locations that are obstructed from view (blind spots) to the thermal imaging camera
- Pan and Tilt mechanism for automated and remote aiming of the camera

Designed for Hazardous Environments

Each thermal imaging camera is mounted in a sealed housing that includes internal cooling and a positive pressure purge to prevent dirt or flammable gases from entering the enclosure. Each camera has an Internet IP address and password protection, allowing control from any computer in the network. All field hardware is protected by ATEX or Class I, Div 2 certified housings.



The ThermalSpec in its protective enclosure. Power, communication, and air connections are contained in a single hose.



The ThermalSpec Controls Box.

Proven in the Field

LumaSense has reference installations at major petrochemical sites worldwide, including the USA, Germany and Taiwan. ThermalSpec is the trusted supplier to tier one engineering firms building today's most advanced and automated plants, including the IGCC projects in the USA.

Service and Support

The mission of the LumaSense services organization is to deliver consistent world-class customer support so you can focus on your business. Our highly trained customer care agents, engineers, scientists, and PhDs are ready to help with:

- Technical and product support
- Order, shipment, repair, and parts
- Field Services including installation, and maintenance
- LumaServ™ extended warranty and maintenance agreements

Technical Data

MC320 IR Camera

Detector	320 x 240 Uncooled Focal Plane Array (Microbolometer)
Temperature and Spectral Range	-40 to 120 °C and 50 to 500 °C; High Temperature Options Available
Measurement Accuracy	±2% of Reading or 2 °C
Field of View	21° (H) x 16° (V), 53° (H) x 40° (V), or 75° (H) x 56° (V)
Focus Range	30 cm to Infinity
Spectral Band	8.0 to 14.0 μm
Image Update Rate	Up to 60 Frames/sec
Sensitivity/NETD	0.06 °C @ 30 °C
A/D Resolution	16 bit

Physical Characteristics

Dimensions	8.5" (H) x 29" (L) x 10.6" (OD - Excluding Projections)
Weight	Approximately 60 lbs.

Environmental

Operating Temperature	-15 °C to 75 °C
Storage Temperature	-40 °C to 70 °C
Shock Resilience	30G (IEC60068-2-29/JIS C 0042)
Vibration Resilience	3G (IEC60068-2-6/JIS C 0040)

8-Channel Input/Out Modules

Relay Output (Alarms) Module	8 relay channels with each channel driving up to 240VAC at 3 Amps
Universal Input (Remote Triggering) Module	8 channels with each channel ranging from 5 VDC to 240 VAC
4-20 mA Output Module	8 channels allowing LumaSpec R/T software to send each ROI temperature to a 4-20mA output.
4-20 mA Input Module	8 channels allowing the LumaSpec R/T software to store external signals with captured temperature data.

Interface

Communication	Gigabit Ethernet
---------------	------------------

Online Thermal Image Processing Software

Presentation	In run mode, the screen displays a live thermal image in 256 colors. Images can also be frozen.
Remote Camera Control Functionality	Select the camera type, mode, range, temperature scale and lens. Also allows adjustments to be made for focusing, emissivity, ambient calibration, and percentage of transmission loss.
Real-time Image and Data Acquisition	Large amounts of data can be captured at a user-adjustable rate.
Multiple Regions of Interest (ROIs)	Process and compute the minimum, maximum, and average temperatures for up to 32 Regions of Interest defined in a variety of shapes.
Multiple Color Palettes	Flexibility for optimal image clarity.
Off-Line Analysis	Replay and analyze image sequence files that have been previously captured and saved to disk.

Electrical

Power Supply	12 Volt DC, 24 Watts (Power Supply Included)
--------------	--

Housing

ATEX and Class I, Div 2	Includes IR Transparent Window, interface connections, power termination strip, vortex air cooler with thermostat control or optional heater with thermostat control
-------------------------	--

LumaSpec R/T Multiple IR Camera System Package

The LumaSpec R/T Multiple IR Camera System Package is a unique software add-on that allows data obtained from up to 24 cameras to be monitored simultaneously in real-time on a single computer.

Lenses

The MC320 is supplied with a standard lens offering a 21° (H) x 16° (V) field of view. Optional Telephoto and Wide Angle lenses are also available.

Remote-Controlled Pan/Tilt Head

A remote-controlled pan-and-tilt head is available.

LumaSense Technologies

Americas and Australia
Sales & Service
Santa Clara, CA
Ph: +1 800 631 0176
Fax: +1 408 727 1677

info@lumasenseinc.com

LumaSense Technologies, Inc., reserves the right to change the information in this publication at any time.

Europe, Middle East, Africa
Sales & Service
Frankfurt, Germany
Ph: +49 69 97373 0
Fax: +49 69 97373 167

India
Sales & Support Center
Mumbai, India
Ph: +91 22 67419203
Fax: +91 22 67419201

China
Sales & Support Center
Shanghai, China
Ph: +86 133 1182 7766
Fax: +86 21 5877 2383

Awakening Your 6th Sense

www.lumasenseinc.com

©2014 LumaSense Technologies. All rights reserved.
ThermalSpecationCVM_Brochure-EN - Rev. 09/08/2014